

**(19) World Intellectual Property Organization  
International Bureau**



1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100 101 102 103 104 105 106 107 108 109 110 111 112 113 114 115 116 117 118 119 120 121 122 123 124 125 126 127 128 129 130 131 132 133 134 135 136 137 138 139 140 141 142 143 144 145 146 147 148 149 150 151 152 153 154 155 156 157 158 159 160 161 162 163 164 165 166 167 168 169 170 171 172 173 174 175 176 177 178 179 180 181 182 183 184 185 186 187 188 189 190 191 192 193 194 195 196 197 198 199 200 201 202 203 204 205 206 207 208 209 210 211 212 213 214 215 216 217 218 219 220 221 222 223 224 225 226 227 228 229 230 231 232 233 234 235 236 237 238 239 240 241 242 243 244 245 246 247 248 249 250 251 252 253 254 255 256 257 258 259 260 261 262 263 264 265 266 267 268 269 270 271 272 273 274 275 276 277 278 279 280 281 282 283 284 285 286 287 288 289 290 291 292 293 294 295 296 297 298 299 300 301 302 303 304 305 306 307 308 309 310 311 312 313 314 315 316 317 318 319 320 321 322 323 324 325 326 327 328 329 330 331 332 333 334 335 336 337 338 339 340 341 342 343 344 345 346 347 348 349 350 351 352 353 354 355 356 357 358 359 360 361 362 363 364 365 366 367 368 369 370 371 372 373 374 375 376 377 378 379 380 381 382 383 384 385 386 387 388 389 390 391 392 393 394 395 396 397 398 399 400 401 402 403 404 405 406 407 408 409 410 411 412 413 414 415 416 417 418 419 420 421 422 423 424 425 426 427 428 429 430 431 432 433 434 435 436 437 438 439 440 441 442 443 444 445 446 447 448 449 450 451 452 453 454 455 456 457 458 459 460 461 462 463 464 465 466 467 468 469 470 471 472 473 474 475 476 477 478 479 480 481 482 483 484 485 486 487 488 489 490 491 492 493 494 495 496 497 498 499 500 501 502 503 504 505 506 507 508 509 510 511 512 513 514 515 516 517 518 519 520 521 522 523 524 525 526 527 528 529 530 531 532 533 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553 554 555 556 557 558 559 560 561 562 563 564 565 566 567 568 569 570 571 572 573 574 575 576 577 578 579 580 581 582 583 584 585 586 587 588 589 590 591 592 593 594 595 596 597 598 599 600 601 602 603 604 605 606 607 608 609 610 611 612 613 614 615 616 617 618 619 620 621 622 623 624 625 626 627 628 629 630 631 632 633 634 635 636 637 638 639 640 641 642 643 644 645 646 647 648 649 650 651 652 653 654 655 656 657 658 659 660 661 662 663 664 665 666 667 668 669 670 671 672 673 674 675 676 677 678 679 680 681 682 683 684 685 686 687 688 689 690 691 692 693 694 695 696 697 698 699 700 701 702 703 704 705 706 707 708 709 710 711 712 713 714 715 716 717 718 719 720 721 722 723 724 725 726 727 728 729 730 731 732 733 734 735 736 737 738 739 740 741 742 743 744 745 746 747 748 749 750 751 752 753 754 755 756 757 758 759 760 761 762 763 764 765 766 767 768 769 770 771 772 773 774 775 776 777 778 779 780 781 782 783 784 785 786 787 788 789 790 791 792 793 794 795 796 797 798 799 800 801 802 803 804 805 806 807 808 809 810 811 812 813 814 815 816 817 818 819 820 821 822 823 824 825 826 827 828 829 830 831 832 833 834 835 836 837 838 839 840 841 842 843 844 845 846 847 848 849 850 851 852 853 854 855 856 857 858 859 860 861 862 863 864 865 866 867 868 869 870 871 872 873 874 875 876 877 878 879 880 881 882 883 884 885 886 887 888 889 890 891 892 893 894 895 896 897 898 899 900 901 902 903 904 905 906 907 908 909 910 911 912 913 914 915 916 917 918 919 920 921 922 923 924 925 926 927 928 929 930 931 932 933 934 935 936 937 938 939 940 941 942 943 944 945 946 947 948 949 950 951 952 953 954 955 956 957 958 959 960 961 962 963 964 965 966 967 968 969 970 971 972 973 974 975 976 977 978 979 980 981 982 983 984 985 986 987 988 989 990 991 992 993 994 995 996 997 998 999 1000 1001 1002 1003 1004 1005 1006 1007 1008 1009 1010 1011 1012 1013 1014 1015 1016 1017 1018 1019 1020 1021 1022 1023 1024 1025 1026 1027 1028 1029 1030 1031 1032 1033 1034 1035 1036 1037 1038 1039 1040 1

**(43) International Publication Date**  
**30 August 2001 (30.08.2001)**

**PCT**

**(10) International Publication Number**  
**WO 01/62416 A1**

**(51) International Patent Classification<sup>7</sup>:** B22D 25/00,  
C22C 1/08

(74) Agent: **BERG, André**; Norsk Hydro ASA, N-0240 Oslo (NO).

**(21) International Application Number:** PCT/NO01/00072

(81) **Designated States (national):** AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

**(22) International Filing Date:** 23 February 2001 (23.02.2001)

(25) Filing Language: English

(26) **Publication Language:** English

(30) **Priority Data:**  
20000973      25 February 2000 (25.02.2000)      NO

**(84) Designated States (regional):** ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

(71) Applicant (for all designated States except US): NORSK HYDRO ASA [NO/NO]; N-0240 Oslo (NO).

**Published:**  
— with international search report


**(72) Inventors; and**

(75) **Inventors/Applicants (for US only):** ÅSHOLT, Petter [NO/NO]; Håsenveien 22, N-6600 Sunndalsøra (NO).  
TOKLE, Gunnar [NO/NO]; Landstøveien 11, N-6600 Sunndalsøra (NO).

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**WO 01/62416 A1**

**(54) Title: A METHOD AND MEANS FOR PRODUCING MOULDED FOAM BODIES**

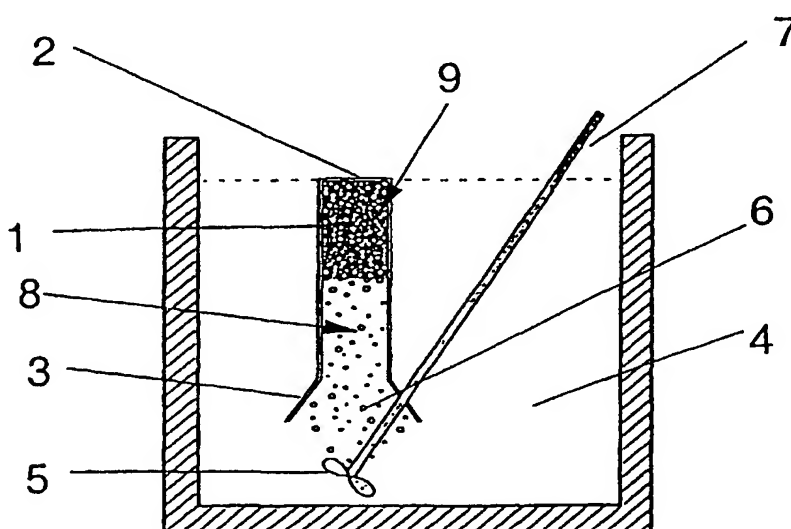

**(57) Abstract:** Present invention relates to a method and means for producing moulded bodies of a metal foam (9), in particular an aluminium foam. The method involves the use of a mould (1) having a cavity (8) and at least one entrance opening (3). The mould is filled with a metal foam in a manner where the entrance opening of the mould is submerged into a metal melt (4) and the melt is caused to foam inside the mould (1) and fill its cavity (8).

5

A method and means for producing moulded foam bodies

Present invention relates to a method and means for producing moulded bodies of metal foam, in particular an aluminium foam.

10

Up to present, several techniques have been proposed for the production of three-dimensional bodies of metal foam. For instance in US 5,865,237 there is disclosed a method for making foam casting objects where a volume of foaming compacts of a powder metal and a gas-evolving foaming agent is heated in a chamber. When at least partial foaming occurs, the contents is forced into a mould cavity where residual foaming is permitted.

15

In Norwegian Patent No. 304359 there is disclosed a method for casting articles by heating a metal matrix composite that contains finely dispersed solid stabilising particles to a temperature above the solidus temperature for the metal matrix. Gas bubbles are introduced into the melted metal composite beneath the surface thereof, whereby a stabilised flowable metal foam is obtained on the surface of the metal composite. Further, the stabilised metal foam that is in a liquid state is thereafter forced into a form cavity where it is allowed to cool and solidify.

25

These methods implies that the foam is forced or pressed into the mould cavity. In dependency of the shape of the mould cavity, inhomogeneity in the foamed body may occur as a result of restricted inflow and frictional forces between the moving metal and the internal mould walls in the cavity under the filling operation. In addition, related to complex three dimensional shapes of the cavity, there can be problems with insufficient filling of the mould causing that the cast product will not be complementary with the mould cavity.

30

According to the present invention, there is provided a novel and simplified method of forming three-dimensional castings of foamed metal, where problems of the above mentioned type can be minimised.

In the following, the invention shall be further described by examples and figures where:

- Fig. 1 shows a mould completely submerged into a melt,  
Fig. 2 shows a mould semi submerged into a melt,  
Fig. 3 shows a porous plug generating bubbles,  
5 Fig. 4 shows the upper part of a mould having an air outlet.

In Figure 1 the mould 1 consists of a vertically arranged cylindrical shell with a closed top  
2. The mould shown here is completely submerged, and its cavity 8 is filled with melt 4  
before the melt is foamed. The lower part of the cylindrical mould is formed as a diverging  
10 or conical shell representing the entrance 3 of the mould. In the melt, below the  
entrance of the mould there is arranged a rotor impeller 5 of a type that delivers gas  
through outlets in the vicinity of the impeller or through outlets in the impeller itself. The  
impeller 5 rotates about an axle 7 that may comprise an internal pipe for leading gas to  
the impeller (not shown). Under the foaming process the delivered cellulating gas forms  
15 bubbles 6 that rises upwards and enters the mould 1. The bubbles continue to rise until  
they reach the upper end wall 2 of the mould. There the bubbles accumulate, and after a  
period of foaming the melt in the mould will be completely foamed. In the figure, foamed  
metal 9 is indicated in the upper half-section of the mould.

20 It should be understood that the above mentioned principle of gas injection, which is  
commonly known by those skilled in the art and further described in the applicants own  
patent application WO 91/01387, may be substituted by other ways of gas injection that  
will generate foaming. The use of a porous plug in this sense will be described later.

25 Coalescence of the bubbles accumulated in the mould can be avoided by addition of  
refractory particles in the melt matrix that reinforce the bubble walls. As shown in the  
example, the mould is completely filled with melt before the foaming starts up. This  
results in the fact that no air will be present in the mould before foaming which contributes  
to reduce possible friction between the foam and the mould walls during the moulding  
process that may cause unwanted structural deformations of the foam.

30

In a second embodiment which is shown in Figure 2 a mould 100 is semi-submerged into  
a melt 104, where the entrance 103 of the mould is located beneath the surface of the  
melt. The mould in this embodiment has the same shape as that of Figure 1, with a top  
102 and a diverging or conical open entrance 103. In this situation the foaming of the

melt by the rotor impeller 105 will start following that the mould cavity has been sufficiently filled with molten metal.

As indicated in figure 4, the mould 403 may in addition be provided with an air outlet or  
5 evacuating means in the top thereof for evacuating air before and/or under appropriate  
periods of the melt filling and foaming operation, to assist the level increase in the cylinder  
to be higher than the level of the ambient melt. Such evacuating means may comprise a  
controllable outlet such as an air vent screw or a valve 400. The figure shows an upper  
part of the mould 403 with a cavity indicated by 402. The mould wall 401 is penetrated in  
10 its upper region by a pipe 404 connected with the valve 400. The valve 400 may further  
be connected with evacuating means such as a vacuum pump (not shown).

An alternative way of filling the mould with melt without the use of specific air evacuating  
means is to turn the mould upside down and back again while it is submerged in the melt.

15

Alternatively, the mould may be dividable into two or more parts (not shown). The latter  
will ease filling of the mould with melt before foaming, and make the casting of complex  
three dimensional components available. With a dividable mould, the mould should  
preferably be divided during submerging in the melt to ease filling. After submerging, the  
20 mould is closed by sliding the parts together, leaving a fully filled cavity. After foam filling  
the mould is lifted from the melt to solidify the foam body, and the mould is again divided  
to remove the foam body.

After the foaming process where the melt inside the mould is replaced by foamed metal, a  
25 lid or the similar may preferably be placed under the bottom part to ensure that the net  
shape foam component still in liquid or semi solid state does not fall out as the mould is  
fully extracted from the melt to solidify and cool the foam inside.

The mould may preferably be preheated before being submerged in the melt in order to  
30 reduce dead time before foam filling. This could be done by integrated heating elements  
in the mould, for instance electric heating elements. Alternatively, the mould or mould  
parts could be heated in a separate chamber. Likewise, the mould could be equipped  
with an integrated cooling circuit to cool the mould subsequent to foam filling to reduce  
time for solidification before the foam body is removed from the mould.

During experiments, it was observed that surface quality varies along the length of the cast components. This is due to the fact that the mould was fixed at the same vertical level during the foaming operation. As the best surface quality was found near the bottom of the components, it is assumed that the observed differences in surface quality is closely linked to the metallostatic pressure in the position where the surface is created. The foam bodies produced by this method have a smooth outer surface in the parts of it that solidifies next to the mould walls, while the interior of the foam body is, of course, porous. An improvement of the all over surface quality is therefore assumed to be achieved if the mould is elevated during foam filling in such a way that the lowermost foam inside is always at the same depth. In this way, the pressure will always be the same where the new foam is accumulated. The mould may be lowered and elevated by an electric hoisting apparatus (not shown).

In the above standing examples there is disclosed a mould of cylindrical shape, but it should be understood that other geometrical shapes can be applied as well.

With the present method, one can cast an aluminium core inside another (hollow) metallic part or the similar, e.g. foam filling inside a steel tube in a crash box for energy absorption applications where the steel tube will serve as the mould in the manufacturing process. Provided that the metallic part can survive staying in the melt for some time (as it is or with some surface treatment), one could imagine to fill such components directly by the present method. This would rationalise the manufacturing process of foam filled hollow components significantly.

Yet another possibility is to use another source for generating the bubbles for foaming, for instance porous plugs or plates, where the gas is injected into the melt from these devices. This could ease the process control as the gas could more easily be turned on and off when needed, for instance in the dead time during mould exchanges. Figure 3 shows this principle for generating foam, where a gas generating device 305 generates bubbles 300 in a melt. The device comprises a porous plug 302, for instance of a ceramic medium or other appropriate material, arranged above a gas distribution chamber 301 having a gas inlet 304. The principle is that the foaming gas is forced through the porous ceramic medium, leading to bubble formation on the opposite side i.e. in the melt.

It should be understood that in accordance with the present method other varieties of products can be made, such as tubes and other products with hollow cross-sections.

Even products having cross-sections with an U-profile can be made by the method. This can be implemented by the arrangement of an insert in the mould before filling (not shown).

- 5 As will be understood on the basis of the above standing paragraphs, the mould itself can preferably be of a re-usable type, or it can simply be a part of the component intended to receive the foam.

10

15

20

25

30

Claims

1. A method for producing moulded bodies of a foamed metal, in particular an aluminium foam, where a mould (1) having a cavity (8) and at least one entrance opening (3) is filled with a metal foam (9),  
5 c h a r a c t e r i s e d i n t h a t  
the mould (1) is filled with melt (4) before foaming, after which the mould is filled with foam (9) by accumulation of separate bubbles rising through the melt (4), while keeping at least the entrance opening (3) submerged in the  
10 melt.
2. A method in accordance with claim 1,  
c h a r a c t e r i s e d i n t h a t  
the mould (1) is raised vertically during foaming.
- 15 3. A method in accordance with claim 1,  
c h a r a c t e r i s e d i n t h a t  
the mould is evacuated before and/or under the filling/foaming process.
4. A method in accordance with claim 1,  
20 c h a r a c t e r i s e d i n t h a t  
the bubbles are generated by appropriate means (5, 305) arranged in the melt (4) below the entrance opening (3) of the mould (1).
5. Means for producing moulded bodies of a metal foam (9), in particular an aluminium foam, comprising a mould (1) having a cavity (8) and at least  
25 one entrance opening (3) for the filling with a metal foam (9), the means further comprising a metal melt (4) and means (5, 305) for injecting a gas into the melt (4) to cause foaming,  
c h a r a c t e r i s e d i n t h a t  
30 the mould (1) is arranged at least with its entrance opening (3) submerged into the melt (4) under its filling.

6. Means in accordance with claim 5,  
characterised in that  
the mould is divided comprising two or more parts.
- 5 7. Means in accordance with claim 5,  
characterised in that  
the mould is further provided with means (400, 404) for draining/evacuating  
air out of the mould cavity (402).
- 10 8. Means in accordance with claim 5,  
characterised in that  
the mould has provisions for heating.
9. Means in accordance with claim 5,  
characterised in that  
15 the mould has provisions for cooling.
10. Means in accordance with claim 5,  
characterised in that  
the means (305) for gas injection during foaming comprises porous plates  
20 (302) or plugs.
11. Means in accordance with claim 5,  
characterised in that  
the means for gas injection during foaming comprises a rotor impeller (5)  
25 with one or more gas outlets.

1/2

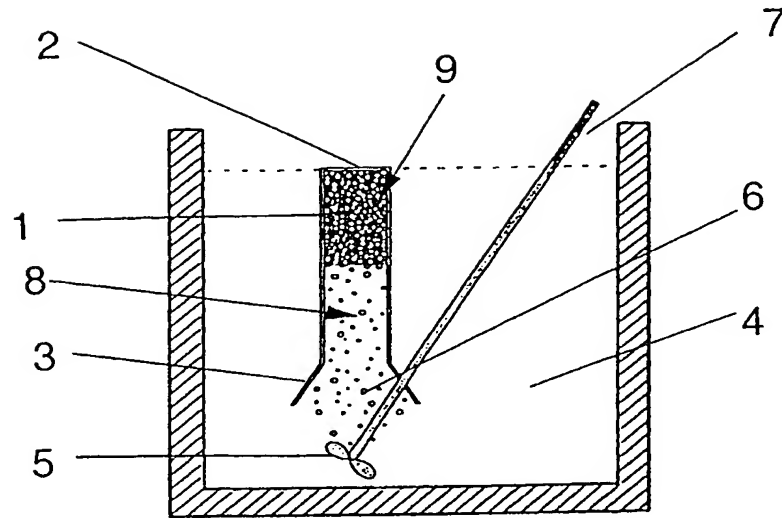


Fig. 1

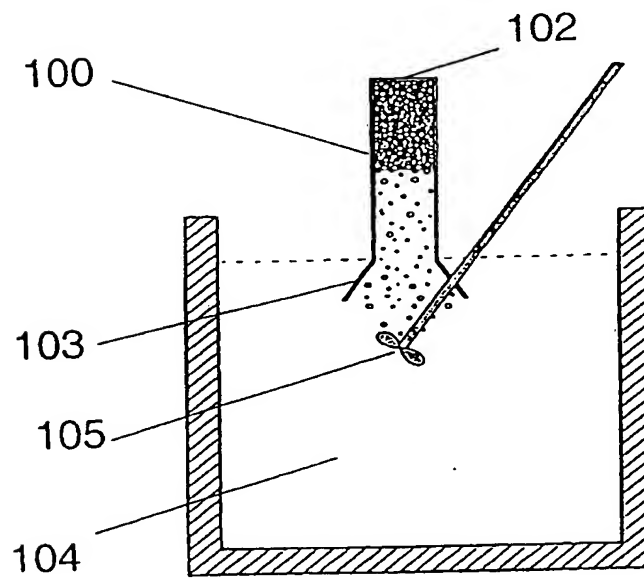


Fig. 2

2/2

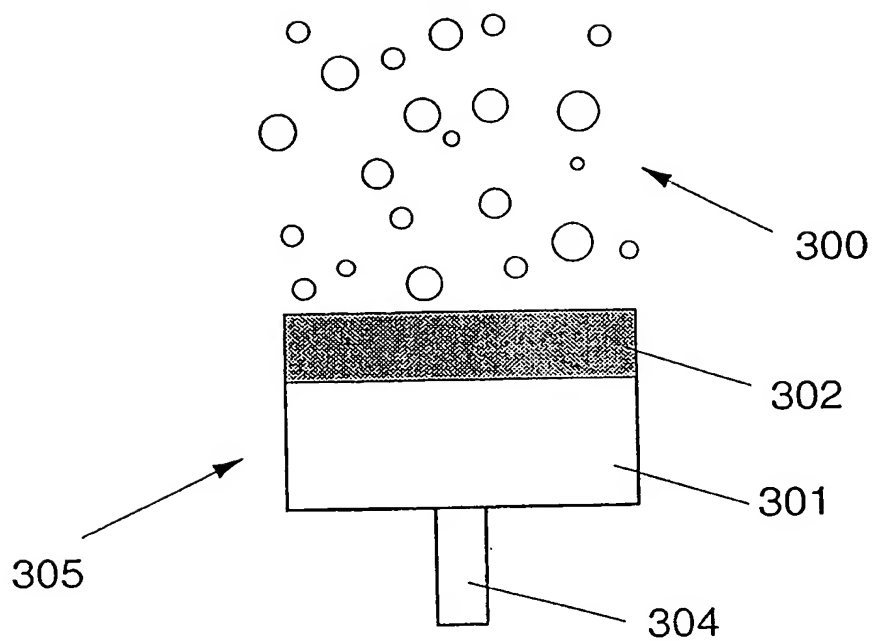


Fig. 3

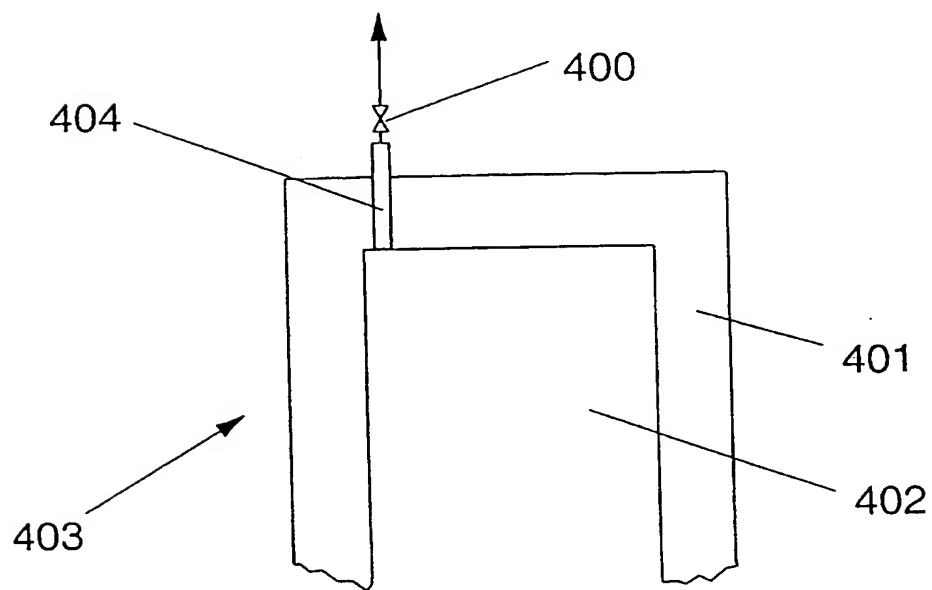


Fig. 4

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/NO 01/00072

## A. CLASSIFICATION OF SUBJECT MATTER

IPC7: B22D 25/00, C22C 1/08

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: B22D, C22C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	DE 4326982 C1 (ALCAN DEUTSCHLAND GMBH), 9 February 1995 (09.02.95), column 4, line 41 - column 5, line 15; column 5, line 53 - line 59, figure 3, abstract  --	1,2,4-7, 10 12
A	GB 892934 A (LOR CORPORATION), 4 April 1962 (04.04.62), page 2, line 52 - line 128, figures 1-3  --	1-12
A	WO 9221457 A1 (ALCAN INTERNATIONAL LIMITED), 10 December 1992 (10.12.92), figures 1-9, claim 1, abstract  -- -----	1-12

☐ Further documents are listed in the continuation of Box C.☒ See patent family annex.

\* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"I" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"I" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&amp;" document member of the same patent family

Date of the actual completion of the international search

31 May 2001

Date of mailing of the international search report

07 -06- 2001

Name and mailing address of the ISA:

Swedish Patent Office

Box 5055, S-102 42 STOCKHOLM

Facsimile No. +46 8 666 02 86

Authorized officer

Ulf Nyström/ELY

Telephone No. +46 8 782 25 00

**INTERNATIONAL SEARCH REPORT**  
Information on patent family members

International application No.

**PCT/NO 01/00072**

Patent document cited in search report			Publication date	Patent family member(s)	Publication date
DE	4326982	C1	09/02/95	NONE	
GB	892934	A	04/04/62	NONE	
WO	9221457	A1	10/12/92	AT 140169 T	15/07/96
				CA 2109957 A,C	10/12/92
				DE 69212157 D,T	21/11/96
				EP 0587619 A,B	23/03/94
				JP 3045773 B	29/05/00
				JP 6507579 T	01/09/94
				US 5334236 A	02/08/94